

Product code: PVTEA

Permatreat-EA is a versatile, linear treatment system that can provide source control and pollution treatment in a wide variety of locations and applications.

The Permatreat-EA functions as a combined run-off collection, silt and oil interceptor and treatment system. It is designed to be ideally laid with zero gradient to prevent the development of lateral velocities, 'stilling' sheet run-off from each sub-catchment and encouraging silt deposition within each channel. The treated stormwater outlets discharge from the side of the treatment device, having passed through the Permatreat-EA weir and baffle arrangement, which separates oil and silt, preventing it from progressing further into the drainage system.

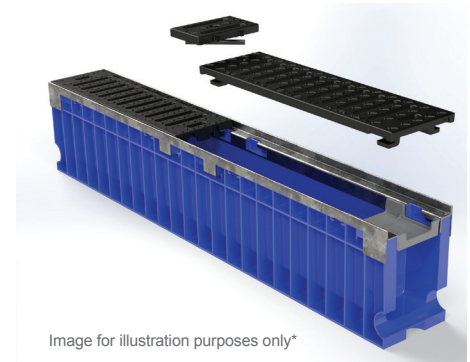


Image for illustration purposes only*

Applications

Permatreat-EA is used for stormwater collection, interception and the treatment of associated pollutants. The system comprises of single or multiple interconnected units appropriately located to collect surface water run-off from sub-catchments of predominantly impervious or pervious pavements. Permatreat-EA is suitable for use in a range of applications including residential, industrial estates and car parks.

Key Benefits

- Gravity separation of oils and silts at source
- Trapped effluent naturally treated by aerobic digestion
- Can enhance water quality and eliminate the need for end of line petrol/oil interceptors
- The system complies with the regulations of the treatment train criteria in a SuDS scheme as defined in PPG3
- 100% recyclable

Performance

Permatreat-EA is a type M channel rated to C250 loading in accordance with BS EN 1433:2002 when installed with concrete bed and haunch in accordance with site specific construction details. If a loading capacity is required to D400, please use Permatreat-HD.

Installation

Permatreat-EA must be installed on a load bearing concrete bed and haunch in accordance with site specific construction details and the Permatreat Installation Guide.

Technical Support

Detailed guidance and assistance is available.

For further information, please contact our Technical Team on **+44 (0) 1509 615100** or email civils@polypipe.com or visit www.polypipe.com/civils/tech-hub

ELEMENT	VALUE
PHYSICAL PROPERTIES	
Weight per unit	12.1kg
Length	1000mm
Width	139mm
Depth	201mm
Material	Polypropylene
Grating	Ductile iron
Catchment area	30m ²
Loading	Rated to C250
Chemical Resistance	Polypropylene has good resistance to the most common chemicals found within stormwater run-off (i.e. petrol, oils and acids)

Effluent concentrations are below PPG3 Class I requirements

Note: Ancillary Universal Connector 40mm diameter

*Over time the grating will develop a naturally occurring iron oxide protective coating often referred to as a patina. The colour of the patina is typically a deep reddish-brown and dependent on local conditions might take a year to reach its final colour. During early stages of this process it is normal for the grating colour to appear rust-orange.

Permatreat-EA can be utilised in these SuDS techniques

TECHNIQUES													
Blue-Green roofs	Podium Decks	Trees	Sports Pitches	Cycle Paths	Permeable Paving (sub base & podium)	Bioretention & Rain Gardens	Attenuation Storage Tanks	Infiltration	Swales	Filter Drains	Detention Basins	Ponds & Wetlands	Filter Strips
						✓	✓	✓					

Visit www.polypipe.com/civils/gi

All descriptions and illustrations in this publication are intended for guidance only and shall not constitute a 'sale by description'. All dimensions and weights given are nominal and Polypipe may modify and change the information, products and specifications from time to time for a variety of reasons, without prior notice. The information in this publication is provided 'as is' in July 2020. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this publication you must do so at your own risk. All rights reserved. Copyright in this publication belongs to Polypipe and all such copyright may not be used, sold, copied or reproduced in whole or part in any manner in any media to any person without prior consent. © Polypipe is a registered trademark of Polypipe. All Polypipe products are protected by Design Right under CDPA 1988. Copyright © 2020 Polypipe. All rights reserved.